
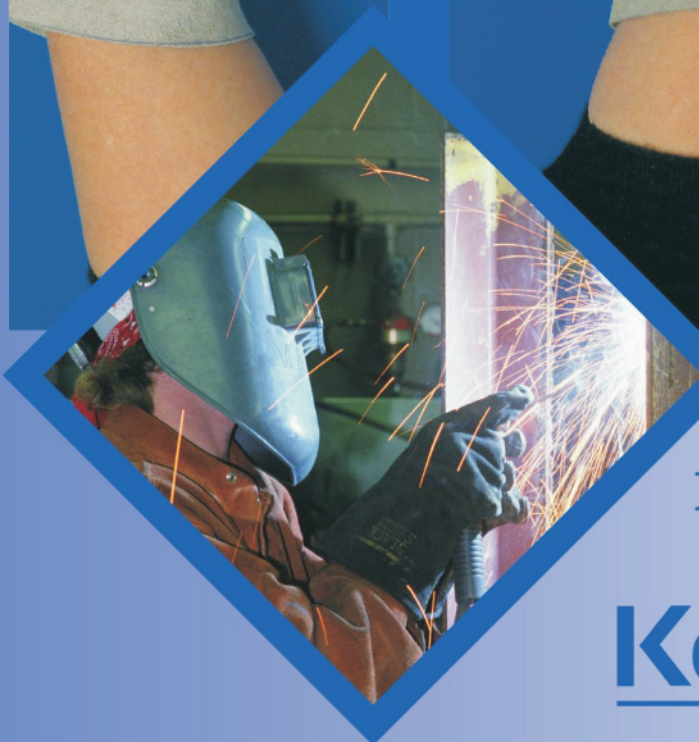


# PUREFIX STEEL


RENSEPASTA TIL RUSTFRIT STÅL • PICKLING PASTE

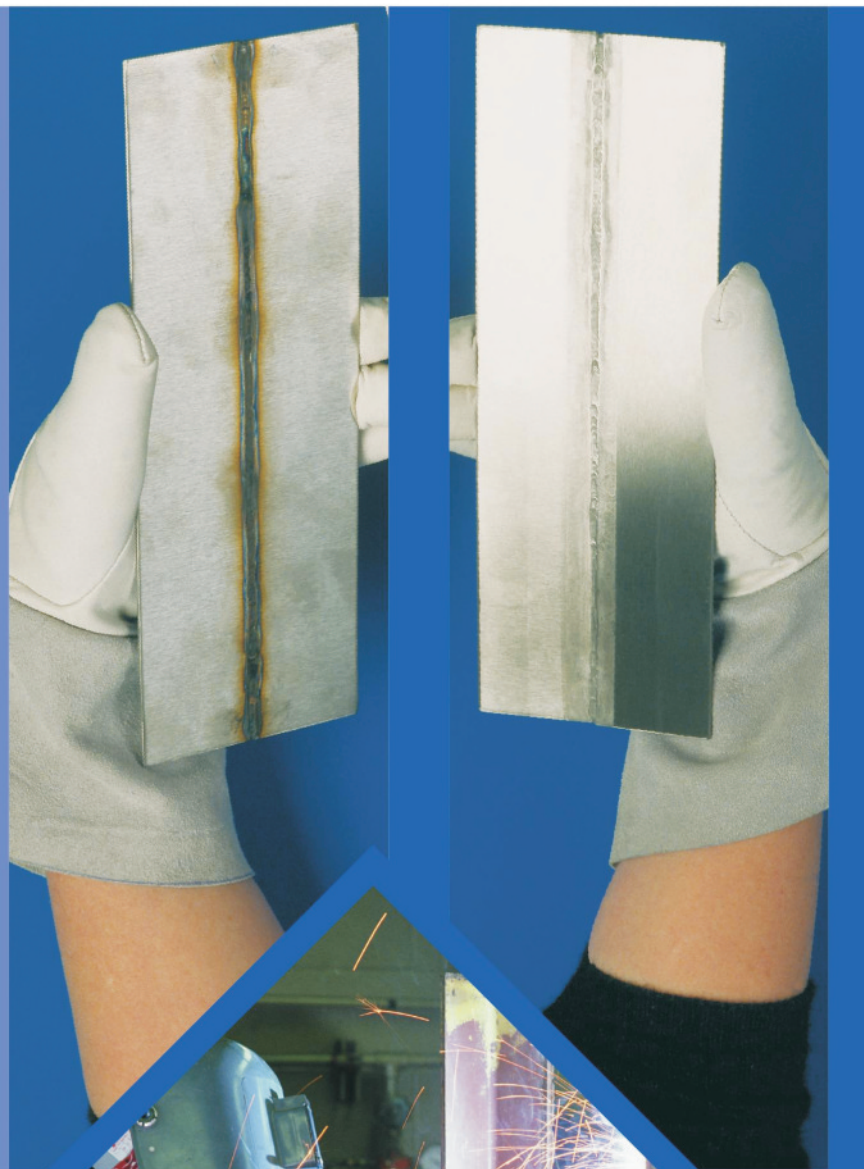

- den lette vej til et bedre resultat !  
- simply a better way !

**Kemitura** 

# PUREFIX STEEL



## PUREFIX STEEL

PUREFIX STEEL rensespasta, er specielt formuleret til afrensning af svejsesømme på rustfrit stål. Midlet fjerner oxidering og anløbningsfarver, og hindrer senere overfladerust.

PUREFIX STEEL indeholder ingen giftige stoffer såsom flussyre, og er ikke underlagt giftlovgivningen.

PUREFIX STEEL er en løbefast pasta, der er let at påføre. Reaktionsiden er 5-10 minutter, hvorefter pastaen vaskes af med vand.

PUREFIX STEEL anvendes til rensning af alle svejsesømme på rustfrit stål for at opnå et ensartet udseende og genoprette korrosionsbestandigheden.

PUREFIX STEEL is a special formulated paste, for cleaning stainless steel welds. It removes oxides and discolouration, and prevent surface corrosion.

PUREFIX STEEL does not contain hydrofluoric acid or other toxic ingredients.

PUREFIX STEEL is a thixotropic paste, easy to apply. The reaction time is 5-10 minutes, after which the paste simply can be wiped off with water.

PUREFIX STEEL can be used on all stainless steel welds for obtaining uniform look and ensuring the corrosion resistance.



**Kemitura Group A/S**  
**DK-3540 Lynge Industrivej 9**  
**Phone +45 47 17 18 55**  
**www.kemitura.com**  
**mail: kemitura@kemitura.com**

## ANDRE KEM-LUB HJÆLPEMIDLER

STAINLESS-CLEAN fjerner fedt, snavs, pletter og anløbning - et godt supplement til PUREFIX.

STAINLESS-GUARD er et mildt rengørings- og beskyttelsesmiddel. Modvirker anløbning og afviser fingeraftryk. *Forlang specialprospekt*

## OTHER KEM-LUB PRODUCTS

STAINLESS-CLEAN for removing grease, dirt, spots and oxidizing - for complementary treatment after pickling with PUREFIX. STAINLESS-GUARD for surface cleaning and protection. Prevent fingerspots and oxidizing. *Ask for data sheet*

## Anvendelse: How to use:



Påfør PUREFIX STEEL i et tykt lag 5-10 minutter. Vask midlet af med en 3M svamp plus rigeligt vand. Skyl efter med vand. Til evt. passivering kan anvendes soda. Gentagen behandling kan være nødvendig.

Forbrug: 1 kg. PUREFIX STEEL pr. 10-15 m. svejsesøm. PUREFIX STEEL leveres i 1 kg. dåser og 10 kg. spande. Pensler til påføring kan også leveres.

Apply PUREFIX STEEL in a rich layer. Wait for 5-10 minutes. Wipe the paste off with a 3M sponge + plenty of water. Rinse with clean water. For evt. passivating, use soda. The operation may need to be repeated.

Consumption: 1 kg. of PUREFIX STEEL will treat 10-15 m. weld.

PUREFIX STEEL is supplied in 1 kg. containers and 10 kg. buckets. Brushes to apply the paste are also available.